


### INSTRUCTIONS FOR WELCH ALLYN 3.5v LOCKING COLLARS

1. Attach instrument head firmly to handle.
2. Note that the locking collar has a tab on one half and a screw in the opposite half. (The small screw will not fall out.)
3. Swing the collar fully open and hold so that the tab is on the top side.
4. Tilt the collar downward and start the tab forward into either slot on the instrument head. Simultaneously, rotate the half upward until it becomes flush with the handle.
5. Close the collar and screw the halves together with the wrench provided. **Do not overtighten screw.**

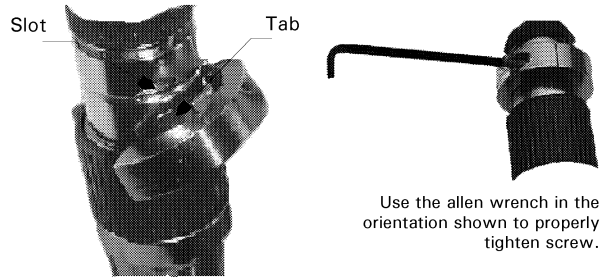


**WelchAllyn**<sup>®</sup> WELCH ALLYN, INC.  
Skaneateles Falls, NY 13153  
U.S.A.

Form No. 767093 Rev. A

Printed in U.S.A.

### INSTRUCTIONS FOR WELCH ALLYN 3.5v LOCKING COLLARS

1. Attach instrument head firmly to handle.
2. Note that the locking collar has a tab on one half and a screw in the opposite half. (The small screw will not fall out.)
3. Swing the collar fully open and hold so that the tab is on the top side.
4. Tilt the collar downward and start the tab forward into either slot on the instrument head. Simultaneously, rotate the half upward until it becomes flush with the handle.
5. Close the collar and screw the halves together with the wrench provided. **Do not overtighten screw.**

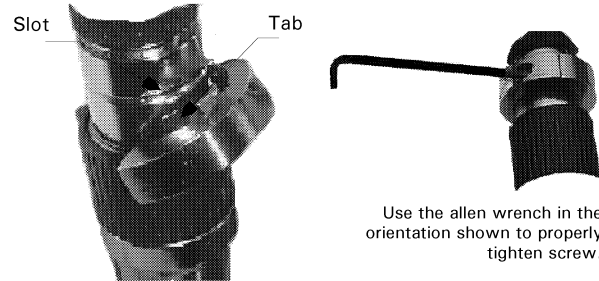


**WelchAllyn**<sup>®</sup> WELCH ALLYN, INC.  
Skaneateles Falls, NY 13153  
U.S.A.

Form No. 767093 Rev. A

Printed in U.S.A.

### INSTRUCTIONS FOR WELCH ALLYN 3.5v LOCKING COLLARS

1. Attach instrument head firmly to handle.
2. Note that the locking collar has a tab on one half and a screw in the opposite half. (The small screw will not fall out.)
3. Swing the collar fully open and hold so that the tab is on the top side.
4. Tilt the collar downward and start the tab forward into either slot on the instrument head. Simultaneously, rotate the half upward until it becomes flush with the handle.
5. Close the collar and screw the halves together with the wrench provided. **Do not overtighten screw.**

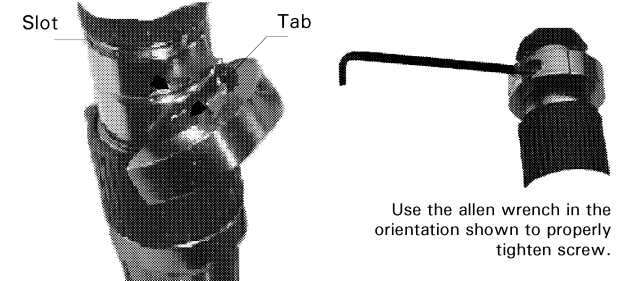


**WelchAllyn**<sup>®</sup> WELCH ALLYN, INC.  
Skaneateles Falls, NY 13153  
U.S.A.

Form No. 767093 Rev. A

Printed in U.S.A.

### INSTRUCTIONS FOR WELCH ALLYN 3.5v LOCKING COLLARS

1. Attach instrument head firmly to handle.
2. Note that the locking collar has a tab on one half and a screw in the opposite half. (The small screw will not fall out.)
3. Swing the collar fully open and hold so that the tab is on the top side.
4. Tilt the collar downward and start the tab forward into either slot on the instrument head. Simultaneously, rotate the half upward until it becomes flush with the handle.
5. Close the collar and screw the halves together with the wrench provided. **Do not overtighten screw.**

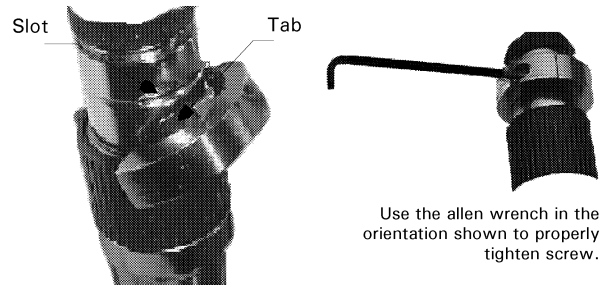


**WelchAllyn**<sup>®</sup> WELCH ALLYN, INC.  
Skaneateles Falls, NY 13153  
U.S.A.

Form No. 767093 Rev. A

Printed in U.S.A.

### INSTRUCTIONS FOR WELCH ALLYN 3.5v LOCKING COLLARS

1. Attach instrument head firmly to handle.
2. Note that the locking collar has a tab on one half and a screw in the opposite half. (The small screw will not fall out.)
3. Swing the collar fully open and hold so that the tab is on the top side.
4. Tilt the collar downward and start the tab forward into either slot on the instrument head. Simultaneously, rotate the half upward until it becomes flush with the handle.
5. Close the collar and screw the halves together with the wrench provided. **Do not overtighten screw.**

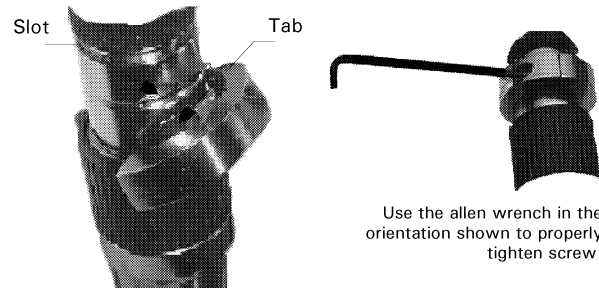


**WelchAllyn**<sup>®</sup> WELCH ALLYN, INC.  
Skaneateles Falls, NY 13153  
U.S.A.

Form No. 767093 Rev. A

Printed in U.S.A.

### INSTRUCTIONS FOR WELCH ALLYN 3.5v LOCKING COLLARS

1. Attach instrument head firmly to handle.
2. Note that the locking collar has a tab on one half and a screw in the opposite half. (The small screw will not fall out.)
3. Swing the collar fully open and hold so that the tab is on the top side.
4. Tilt the collar downward and start the tab forward into either slot on the instrument head. Simultaneously, rotate the half upward until it becomes flush with the handle.
5. Close the collar and screw the halves together with the wrench provided. **Do not overtighten screw.**

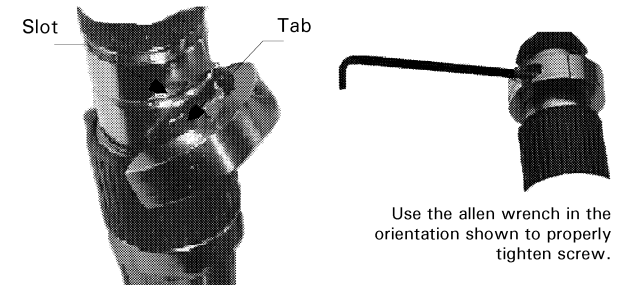

**WelchAllyn**<sup>®</sup> WELCH ALLYN, INC.  
Skaneateles Falls, NY 13153  
U.S.A.

Form No. 767093 Rev. A

Printed in U.S.A.